

Uninterruptible Power Systems



XT

G8000 Series

80/100/150/225/300 KVA


Unity
Output
P.F.

*Models Now
Available with
208 V Output*

- Input Power Factor > 0.99
- Output Power Factor 1.0
- Input Current THD < 5%
- Internal Isolation Transformer
- 208 V Output Models Available
- True Online, Double-Conversion UPS
- 100% Unbalanced Load Capability
- Electronic Battery Isolation for Battery Longevity
- Complete Front-Access for Installation, Operation, and Service
- XT Series Designed for Extreme Applications (Harsh Environments)
- External Battery Options for Customized Battery Backup Time
- IGBT DC Converter/Inverter Design
- Generator-Friendly Design and Compatibility
- SNMP/Web-Based Monitoring
- Flywheel Compatible
- Assembled in USA

G8000 UPS 80/100/150/225/300 KVA

Model Number		T80S3K08KK6XS2H	T80S3K10KK6XS2H	T80S3K15KK6XSNH	T80S3K22KK6XSNH	T80S3K30KK6XSNH
Capacity	KVA/KW	80/80	100/100	150/150	225/225	300/300
Topology	True Online, Double Conversion, IGBT PWM, with Unity Power Factor Output					
Input	Voltage	AC Input, 480 V, Three-Phase, Three-Wire + Ground/Bypass Input, 480 V, Three-Phase, Four-Wire + Ground				
	Voltage Range	480 V +10 to -15% (408 to 528 V Without Utilizing Battery)				
	Power Factor	Greater than 0.99 Lagging				
	Current THD	Less than 5%				
	Frequency	60 Hz (±5%)				
	Current Limit	125% Maximum				
Output	Voltage	480/277 V, 208/120 V, Three-Phase, Four-Wire and Ground			480/277 V, Three-Phase, Four-Wire and Ground	
	Frequency	60 Hz, ±0.01%				
	Voltage Regulation	±1.0% (0.5% Typical)				
	Power Factor	1.0 Unity (20% More Power Over Previous Model)				
	Voltage THD	±3% for 100% Linear Loads		±5% for 100% Non-Linear Loads		
	Overload (Inverter)	125% for 10 Minutes; 150% for 60 Seconds				
	Overload (Bypass)	1000% for One Cycle, 125% Continuous				
Battery	DC Link	360 VDC				
	Ripple Voltage	±0.2% of DC Voltage				
Environment	Temperature Range	0° to 30°C Unity PF, 0° to 40°C at 0.8 PF (Operating)				
	Relative Humidity	30% to 90% Non-Condensing				
	Heat Rejection at Unity PF	28,387 BTUs/Hour	34,222 BTUs/Hour	44,506 BTUs/Hour	68,240 BTUs/Hour	85,300 BTUs/Hour
	Efficiency	90.6%	91.2%	93.0%	92.3%	92.7%
	Altitude	3,200 Feet (1000 Meters) (Maximum Without Derating)				
	Audible Noise	< 65 DBA at 1 Meter		< 68 DBA at 1 Meter		70 DBA at 1 Meter
Dimensions	Dimensions (W x D x H)	36.8" x 32.5" x 79.2"		55.1" x 31.8" x 79.2"		76.8" x 35.7" x 79.4"
	Weight	1,390 lbs.	1,740 lbs.	2,467 lbs.	2,980 lbs.	4,575 lbs.
Features	Output Unity Power Factor, Dual-Input Feed, Output Isolation Transformer, Electric Battery Isolation, RS232 and Dry Contact Interface					
Standards	UL 1778, CUL, NEC, ISO9001, ISO14001, ANSI C62.41 (IEEE 587)					
Warranty	Three Years on UPS Electronics Standard; Up to Five Years Available; Three Years on Batteries with Startup Purchase; See Toshiba Warranty Policy for Full Details					
Service	24-Hour, 365-Day Technical Support 1-877-867-8773					

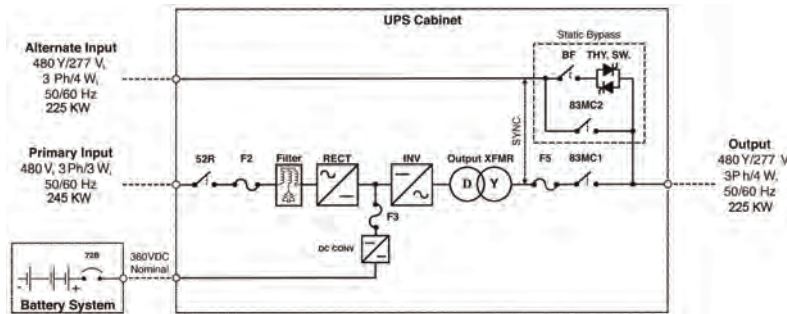

UPS ADJUSTABLE SPEED DRIVES MOTORS CONTROLS INSTRUMENTATION PLC

TOSHIBA

Available Through:

**TOSHIBA INTERNATIONAL CORPORATION
INDUSTRIAL DIVISION**

13131 West Little York Road, Houston, Texas 77041
 Tel 713/466-0277 Fax 713/466-8773
 US 800/231-1412 Canada 800/872-2192 Mexico 001/800/527-1204
 www.toshiba.com/ind
 Copyright 7/2009 UPS G8000 B05 23 08-002

